

Wide Temp. - IM Series



21.5" 6 Sides Full IP65 Stainless Touch Monitor

Features

- Fanless and rugged design
- Wide temperature: -20 ~ 60°C
- True Flat PCT touch solution
- Resolution 1920 x 1080 dpi
- Full 304 IP65 6 sides stainless chassis
- VESA mount & Yoke mount



Specifications

Model No.	IM215PW03	IM215PW04
Display		
Size	21.5" TFT (16:9)	
Resolution	1920 x 1080 dpi	
Colors	16.7M	
Luminance	350nit	
Contrast Ratio	1000 : 1	
View Angle (H/V)	178° / 178°	
High Brightness (Optional)		
Resolution	1920 x 1080 dpi	
Color	16.7M	
Luminance	1000nit	
Contrast Ratio	1000 : 1	
Viewing Angle (H/V)	178° / 178°	
I/O Ports		
VGA	V	V
HDMI		V
USB (for touch screen)	V	V
Power Requirement		
Power Requirement	DC in 12V	
Touch Screen		
Touch Screen	True flat PCT	



Kingdy Technology Inc.

No. 8, Ln. 25, Zhongban Rd., Zhonghe Dist., New Taipei City 23556, Taiwan

Tel : +886-2-3234-6288 Fax : +886-2-3234-3199 E-mail : sales@kingdy.com.tw www.kingdy.com.tw



OS support	
OS support	Win Pro 10 / Embedded Win 7, 8, 10 / Win 10 IoT
Mechanical & Environmental	
Operation Temp.	-20 ~ 60°C
Storage Humidity	10 ~ 90%, non-condensing
Mount	VESA mount (75 x 75 mm) & Yoke mount
Dimension (WxHxD)	607 x 400 x 65 mm
Weight	TBD
Optional	
P/N: 2351206003	Full IP65 Waterproof Power adaptor with European power cord (60W / 90 ~ 295V AC input / 12V DC output)
P/N: 2352406011	Full IP65 Waterproof Power adaptor with European power cord (60W / 90 ~ 295V AC input / 24V DC output)
P/N: 2351206004	Full IP65 Waterproof Power adaptor with US power cord (60W / 90 ~ 295V AC input / 12V DC output)
P/N: 2352406012	Full IP65 Waterproof Power adaptor with US power cord (60W / 90 ~ 295V AC input / 24V DC output)
P/N: 2320000001	Optical Bonding
P/N: 302A17005A	1500 cd/m ² 21.5" LCD panel 1920 x 1080 dpi
P/N: 309M106004	DC in 9 ~ 36V
Order information	
Standard	
IM215PW03	21.5" wide temp full IP65 display, true flat PCT, 1 x VGA, 1 x USB, 1 x 1.8M VGA cable, 1 x 1.8M USB cable, 1 x DC in external power adapter
IM215PW04	21.5" wide temp full IP65 display, 1 x VGA ,1 x USB, 1 x HDMI,1 x 1.8M VGA cable, 1 x 2M HDMI cable, 1 x 1.8m USB cable, 1 x DC in external power adapter
High Brightness	
IM215PK03	21.5" wide temperature full IP65 display, true flat PCT, 1 x VGA, 1 x USB, 1 x 1.8M VGA cable, 1 x 1.8M USB cable, 1 x DC in external power adapter, 1000 cd/m ²
IM215PK04	21.5" wide temperature full IP65 display, 1 x VGA ,1 x USB, 1 x HDMI, 1 x 1.8M VGA cable, 1 x 2M HDMI cable, 1 x 1.8m USB cable, 1 x DC in external power adapter, 1000 cd/m ²
**Specifications are subject to change without notice.	




Kingdy Technology Inc.

No. 8, Ln. 25, Zhongban Rd., Zhonghe Dist., New Taipei City 23556, Taiwan

Tel : +886-2-3234-6288 Fax : +886-2-3234-3199 E-mail : sales@kingdy.com.tw www.kingdy.com.tw



IM215PW03

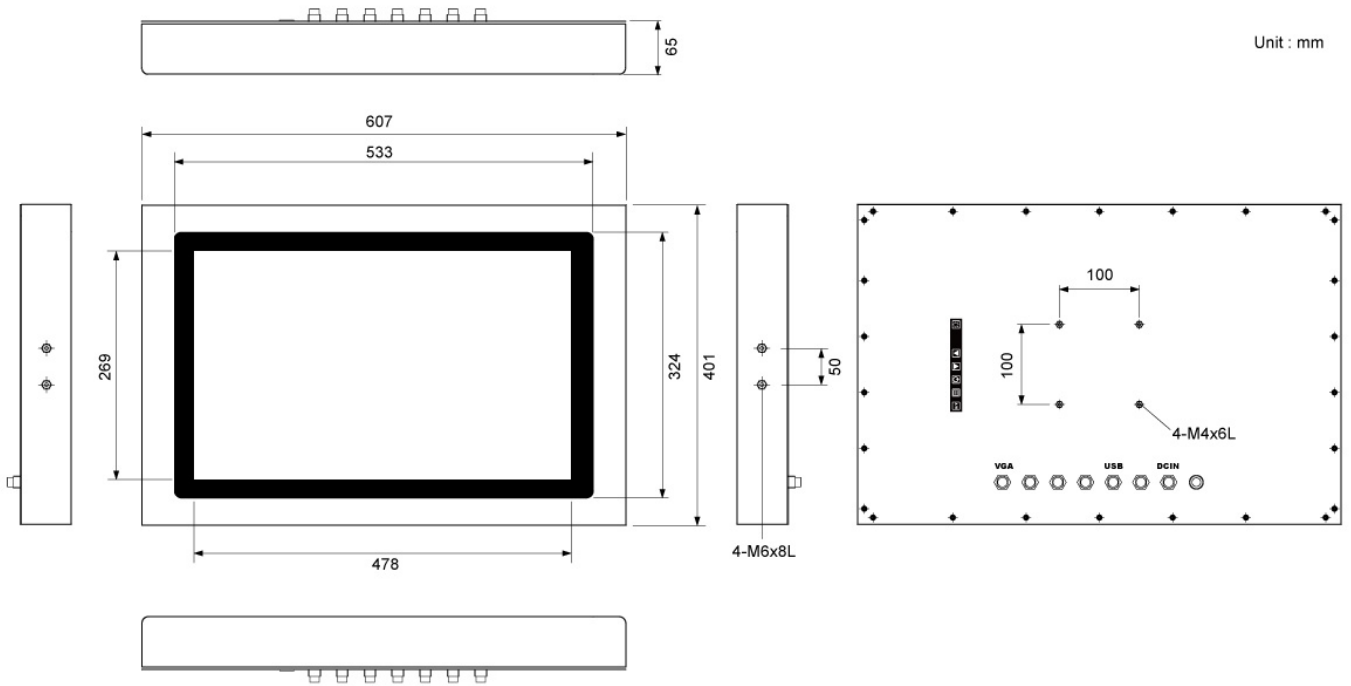

IM215PW04

