

## 21.5", 24" Front IP66 Silver Aluminum Touch Monitor



### Features

- Fanless and rugged design
- True Flat PCT touch solution
- Resolution 1920 x 1080
- IP66 Silver aluminum front bezel
- VESA mount & Panel mount & Clip mount

### Specifications

Model No.	TM215PS03	TM215PS04	TM240PS03	TM240PS04
<b>DISPLAY</b>				
Size	21.5" TFT (16:9)		24" TFT (16:9)	
Resolution	1920 x 1080		1920 x 1080	
Colors	16.7 M		16.7 M	
Luminance	300 cd/m2		250 cd/m2	
Contrast Ratio	3000:1		1000:1	
View Angle (H/V)	178°/178°		173°/165°	
<b>HIGH BRIGHTNESS (OPTIONAL)</b>				
Resolution	1920 x 1080		1920 x 1080	
Colors	16.2M		16.7M	
Luminance	1000 cd/m2		1000 cd/m2	
Contrast Ratio	2000 : 1		1000 : 1	
Viewing Angle (H/V)	176°/176°		170°/165°	
<b>I/O PORTS</b>				
VGA	V	V	V	V
DVI	V		V	
HDMI		V		V
DP		V		V
USB (for touch screen)	V	V	V	V
<b>POWER REQUIREMENT</b>				
Power Requirement	DC in 12V ( 60W )			
<b>TOUCH SCREEN</b>				
Touch Screen	True Flat PCT touch			
<b>OS SUPPORT</b>				
OS support	Win Pro 10 / Embedded Win 7, 8, 10 / Win 10 IoT			
<b>MECHANICAL &amp; ENVIRONMENTAL</b>				
Operation Temp.	0 ~ 45°C			
Storage Humidity	10 ~ 90%, non-condensing			
Mounting	VESA mount (100X100mm) & Panel mount & Clip mount			
Dimension (WxHxD)	607 x 395 x 71 mm		625 x 400 x 71 mm	
Weight	7.0 kg		6.5 kg	
<b>OPTIONAL</b>				
P/N: 2320000001	Optical Bonding			
P/N: 3080108001	HMDI 2m cable			
P/N: 3080109001	DP 2m cable			
P/N: 239SP17002	10pcs x Clips			
P/N: 3011100020	Waterproof sponge			

### ORDERING INFORMATION


#### STANDARD

<b>TM215PS03</b>	21.5" display, true flat PCT, 1 x VGA, 1 x DVI, 1 x USB, 1 x 1.8m VGA cable, 1 x 1.8m USB cable, DC in power adapter
<b>TM215PS04</b>	21.5" display, true flat PCT, 1 x VGA, 1 x DP, 1 x HDMI, 1 x USB, 1 x 1.8m VGA cable, 1 x 1.8m USB cable, DC in power adapter
<b>TM240PS03</b>	24" display, true flat PCT, 1 x VGA, 1 x DVI, 1 x USB, 1 x 1.8m VGA cable, 1 x 1.8m USB cable, DC in power adapter
<b>TM240PS04</b>	24" display, true flat PCT, 1 x VGA, 1 x DP, 1 x HDMI, 1 x USB, 1 x 1.8m VGA cable, 1 x 1.8m USB cable, DC in power adapter


#### HIGH BRIGHTNESS

<b>TM215PJ03</b>	21.5" display, true flat PCT, 1 x VGA, 1 x DVI, 1 x USB, 1 x 1.8m VGA cable, 1 x 1.8m USB cable, DC in power adapter, <b>1000 cd/m2</b>
<b>TM215PJ04</b>	21.5" display, true flat PCT, 1 x VGA, 1 x DP, 1 x HDMI, 1 x USB, 1 x 1.8m VGA cable, 1 x 1.8m USB cable, DC in power adapter, <b>1000 cd/m2</b>
<b>TM240PJ04</b>	24" display, true flat PCT, 1 x VGA, 1 x DVI, 1 x USB, 1 x 1.8m VGA cable, 1 x 1.8m USB cable, DC in power adapter, <b>1000 cd/m2</b>
<b>TM240PJ03</b>	24" display, true flat PCT, 1 x VGA, 1 x DP, 1 x HDMI, 1 x USB, 1 x 1.8m VGA cable, 1 x 1.8m USB cable, DC in power adapter, <b>1000 cd/m2</b>


**TM215PS03**

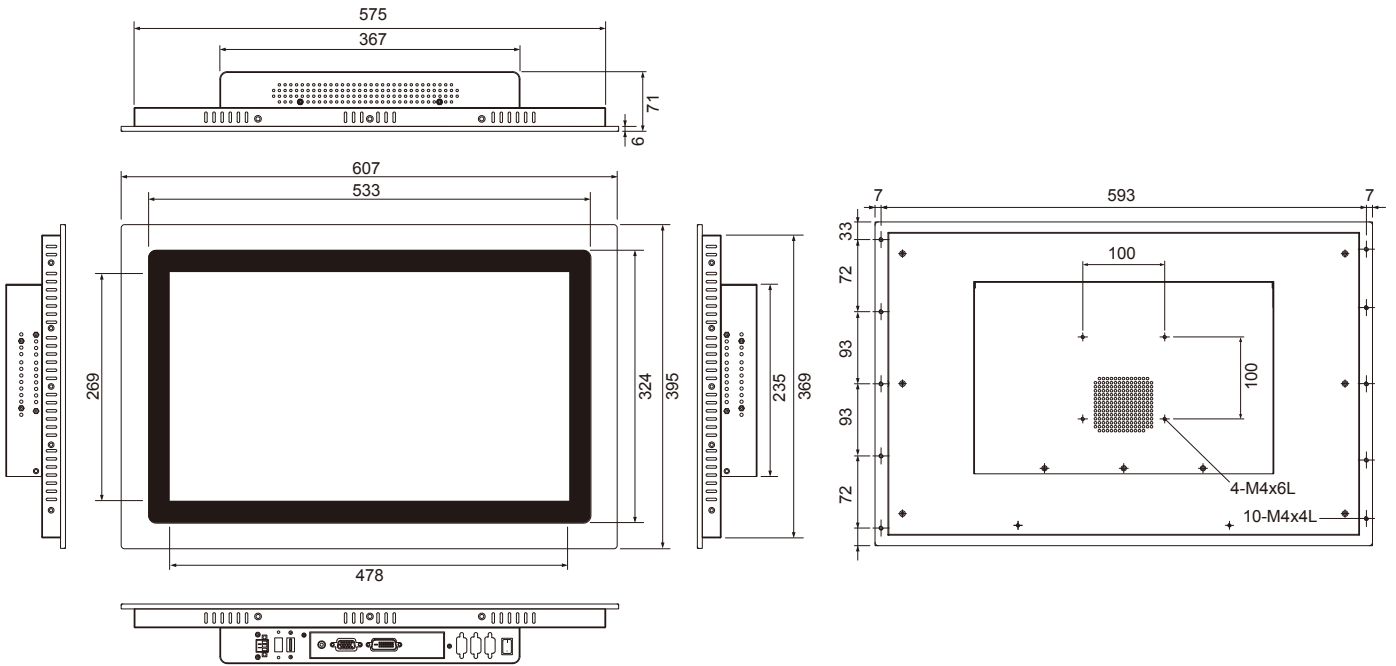


**TM215PS04**

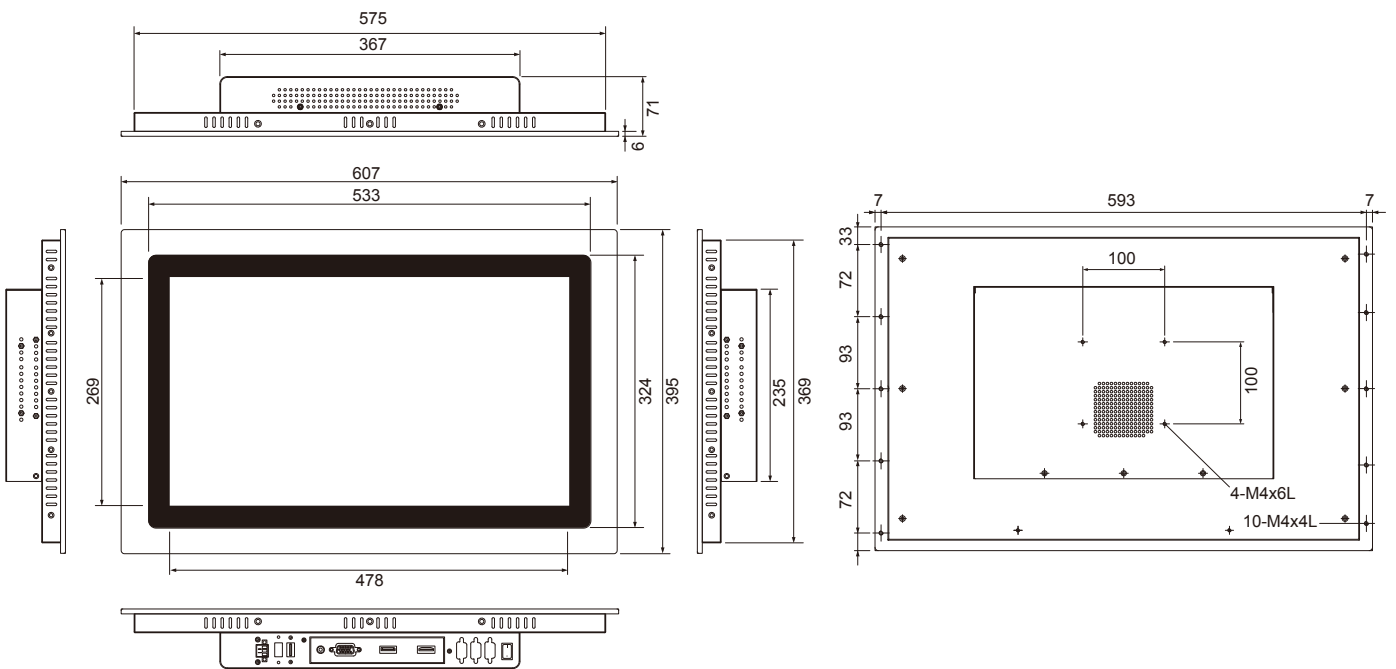

**TM240PS03**

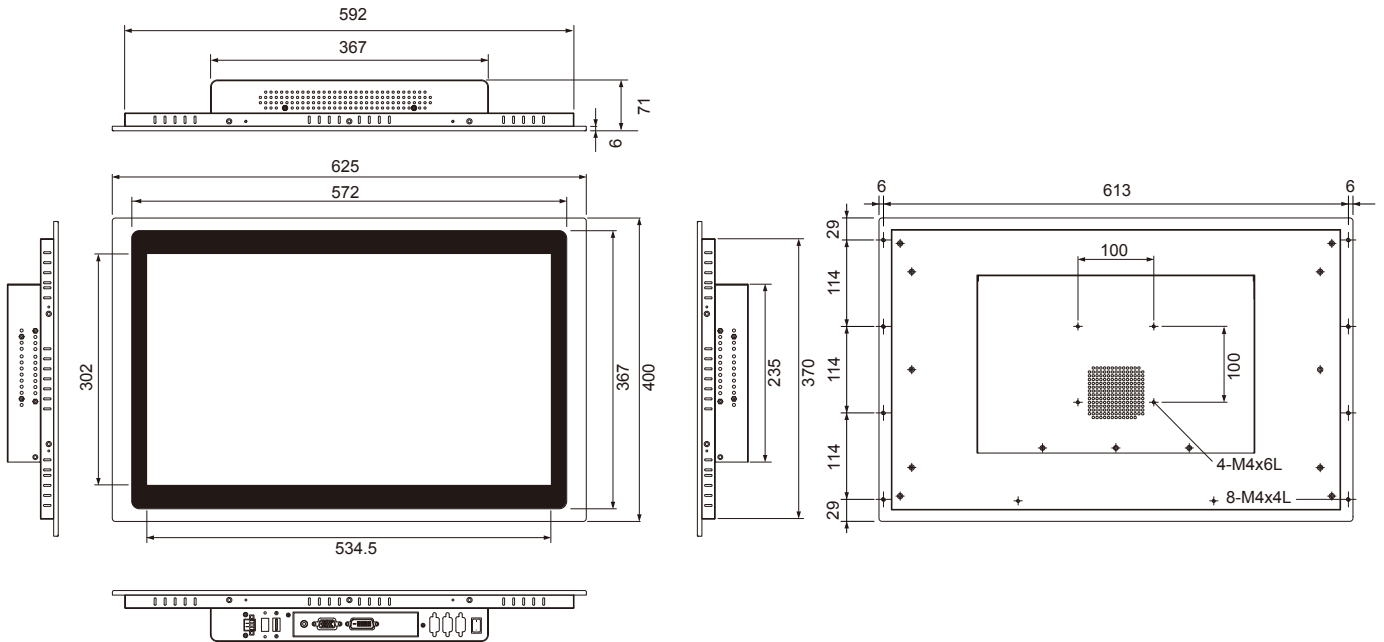

**TM240PS04**

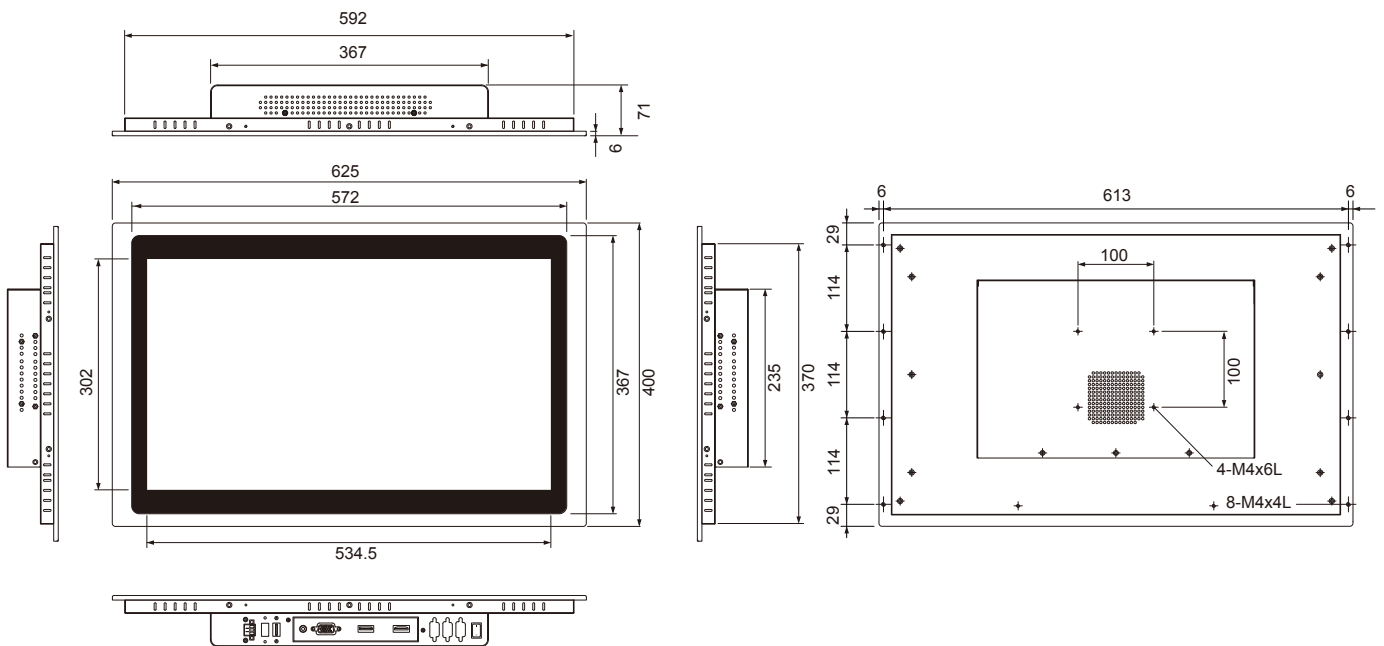

\*Specifications are subject to change without notice.