

21.5" 6 Sides Full IP65 Stainless Touch Monitor

Features

- Fanless and rugged design
- Wide temperature: -20 ~ 60°C
- 5 Wires Resistive touch solution
- Resolution : 1920 x 1080 dpi
- Full 304 IP65 6 sides stainless chassis
- VESA mount & Yoke mount



Specifications

Model No.	WM1215RW03	WM215RW04
Display		
Size	21.5" TFT (16:9)	
Resolution	1920 x 1080 dpi	
Colors	16.7M	
Luminance	350nit	
Contrast Ratio	1000 : 1	
View Angle (H/V)	178° / 178°	
High Brightness (Optional)		
Resolution	1920 x 1080 dpi	
Color	16.7M	
Luminance	1000nit	
Contrast Ratio	1000 : 1	
Viewing Angle (H/V)	178° / 178°	
I/O Ports		
VGA	V	V
HDMI		V
USB (for touch screen)	V	V
Power Requirement		
Power Requirement	DC in 12V (60W)	
Touch Screen		
Touch Screen	5 Wires Resistive (one touch)	
OS support		
OS support	Win Pro 10 / Embedded Win 7, 8, 10	



Mechanical & Environmental	
Operation Temp.	-20 ~ 60°C
Storage Humidity	10 ~ 90%, non-condensing
Mounting	VESA mount (100 x 100mm) & Yoke mount
Dimension (WxHxD)	560 x 360 x 68 mm
Weight	9.3 kg
Optional	
P/N: 302A17005A	1500 cd/m ² 21.5" LCD panel 1920 x 1080 dpi
P/N: 2351206003	Full IP65 Waterproof Power adaptor with European power cord (60W / 90 ~ 295V AC input / 12V DC output)
P/N: 2352406011	Full IP65 Waterproof Power adaptor with European power cord (60W / 90 ~ 295V AC input / 24V DC output)
P/N: 2351206004	Full IP65 Waterproof Power adaptor with US power cord (60W / 90 ~ 295V AC input / 12V DC output)
P/N: 2352406012	Full IP65 Waterproof Power adaptor with US power cord (60W / 90 ~ 295V AC input / 24V DC output)
P/N: 2320000001	Optical Bonding
P/N: 309M106004	DC in 9V ~ 36V
P/N: 3120600002	RS232 touch screen
Ordering Information	
Standard	
WM215RW03	21.5" wide temperature full IP65 display, 5 wires resistive, 1 x VGA, 1 x USB, 1 x 1.8M VGA cable, 1 x 1.8M USB cable, 1 x DC in external power adapter
WM215RW04	21.5" wide temperature full IP65 display, 5 wires resistive, 1 x VGA, 1 x HDMI, 1 x USB, 1 x 1.8M VGA cable, 1 x 2M HDMI cable, 1 x 1.8M USB cable, 1 x DC in external power adapter
High Brightness	
WM215RK03	21.5" wide temperature full IP65 Display, 5 wires resistive, 1 x VGA, 1 x USB, 1 x 1.8M VGA cable, 1 x 1.8M USB cable, 1 x DC in external power adapter, 1000 cd/m ²
WM215RK04	21.5" wide temperature full IP65 Display, 5 wires resistive, 1 x VGA, 1 x HDMI, 1 x USB, 1 x 1.8M VGA cable, 1 x 2M HDMI cable, 1 x 1.8M USB cable, 1 x DC in external power adapter, 1000 cd/m ²
**Specifications are subject to change without notice.	




Kingdy Technology Inc.

No. 8, Ln. 25, Zhongban Rd., Zhonghe Dist., New Taipei City 23556, Taiwan

Tel : +886-2-3234-6288 Fax : +886-2-3234-3199 E-mail : sales@kingdy.com.tw www.kingdy.com.tw



WM215RW03

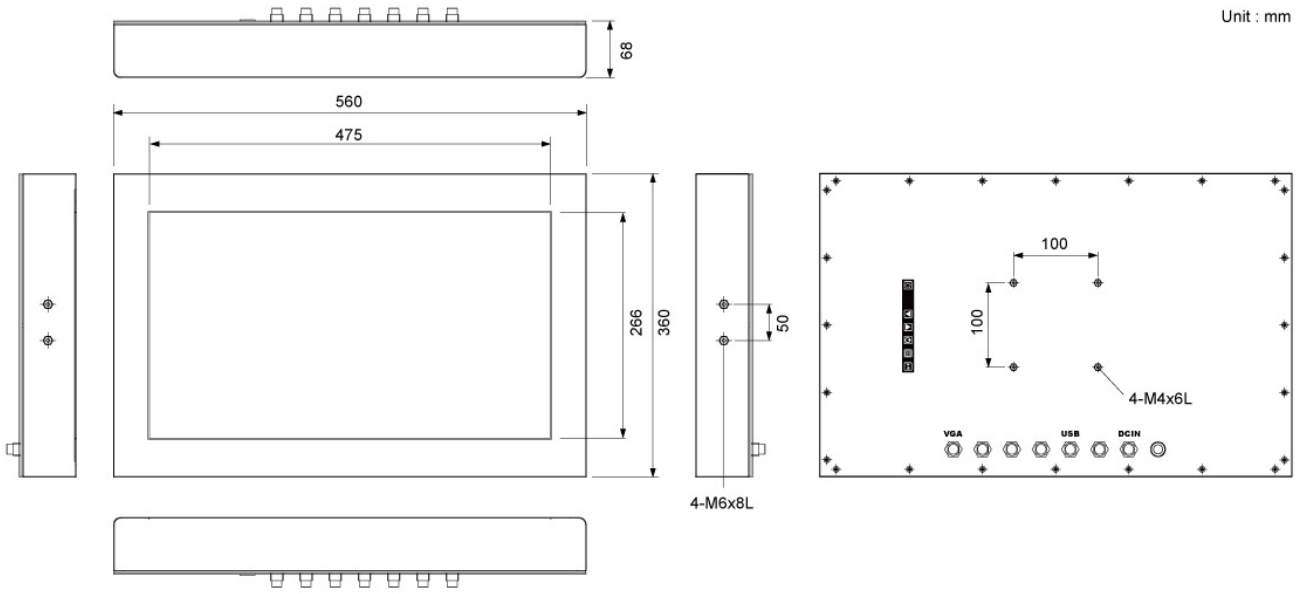

WM215RW04

